


S/N	DESCRIPTION	MATERIAL	NO.
1	CLAMP BODY	ALUMINIUM ALLOY	1
2	KEEPER	ALUMINIUM ALLOY	1
3	U-BOLTS	M.S	2
4	NUTS	M.S	4
5	RIVET PIN	M.S	2
6	SPRING WASH	S. STEEL	4
7	SPLIT PIN	BRASS	2
8	WASHER FOR 12mm U-BOLT	STEEL	4
9	WASHER FOR 17mm U-BOLT	STEEL	2
10	SPACER WASHER	STEEL	1

MINIMUM BEARING STRENGTH 4500kg.

- ⊕ TOLERANCE
 1) +5% and -2% on dimensions.
 2) -2% on weight.
 All dimensions in mm.

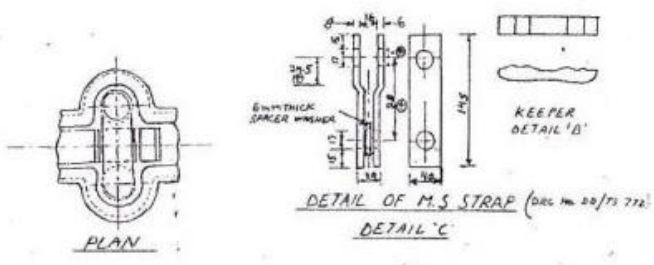

PUNJAB STATE ELECTRICITY BOARD		
DRAWN	DWG NO. 120	SCALE - N.T.S.
CHECKED	DIE CAST ALUMINIUM ALLOY DEAD END CLAMP 2" U-BOLT TYPE FOR ACSR CONDUCTOR FROM 30 mm ² TO 80 mm ²	
A. P. O. - III	P. O. - III	C. P. O. - I

Ⓢ MARKED AMENDMENTS DONE ON 7.9.12